

# MV-ID5016M-\*\*S-WBN

1.6 MP Smart Code Reader



CE

FCC

RoHS

## Introduction

With mechanical autofocus lens, MV-ID5016M-\*\*S-WBN smart code reader can read different types of codes with reading speed up to 90 codes/sec. It adopts Hikrobot's deep learning algorithm to process image with good robustness, and can recognize various complex codes.

## Key Feature

- Adopts built-in deep learning algorithm to read codes with good robustness.
- Adopts mechanical autofocus lens to achieve automatic focusing.
- Adopts multiple IO interfaces for input and output signals.
- Supports multiple communication protocols, including TCP, Serial, FTP, Profinet, etc.
- Adopts CMOS sensor to acquire image data and provide high-quality image.
- Supports RS-232 serial port and indicators displaying device status.


## Available Model

- 6 mm focal length: MV-ID5016M-06S-WBN
- 12 mm focal length: MV-ID5016M-12S-WBN
- 15 mm focal length: MV-ID5016M-15S-WBN
- 25 mm focal length: MV-ID5016M-25S-WBN

## Applicable Industry

Consumer electronics, food and beverage, pharmaceutical, semiconductor, automobile, new energy, etc.

## Dimension

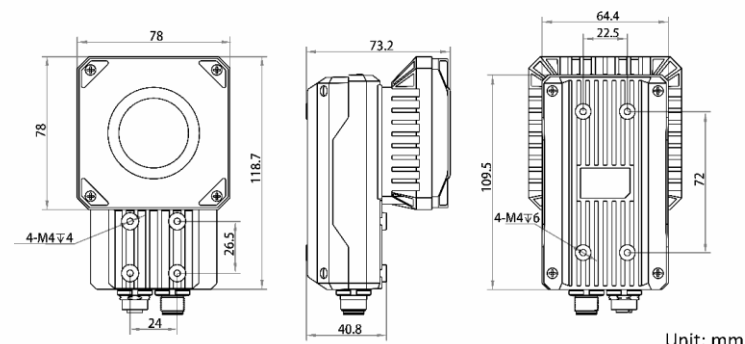

## Specification

Model	MV-ID5016M-06S-WBN	MV-ID5016M-12S-WBN	MV-ID5016M-15S-WBN	MV-ID5016M-25S-WBN
Performance				
Symbologies	1-dimensional codes: Code 39, Code 93, Code 128, CodaBar, EAN 8, EAN 13, UPCA, UPCE, ITF 14, ITF 25, Matrix 25, MSI, China Post, Code 11, Industrial			
	2-dimensional codes: QR Code, Data Matrix			
Max. frame rate	60 fps @1408 × 1024			
Max. reading speed	90 codes/sec			
Sensor type	CMOS, global shutter			
Pixel size	3.45 μm × 3.45 μm			
Sensor size	1/2.9"			
Resolution	1408 × 1024			
Exposure time	16 μs to 1 sec			
Gain	0 dB to 40 dB			
Mono/color	Mono			
Communication protocol	SmartSDK, TCP Client, Serial, FTP, TCP Server, Profinet, Ethernet/IP, MELSEC, Fins, ModBus, SLMP			
Electrical feature				
Data interface	Gigabit Ethernet interface			
Digital I/O	12-pin M12 connector provides power and I/O, including opto-isolated input (LineIn 0/1/2) × 3, opto-isolated output (LineOut 0/1/2) × 3, RS-232 input × 1, and RS-232 output × 1.			
Power supply	12 VDC to 24 VDC			
Max. power consumption	Approx. 36 W@24 VDC (light source is enabled)			
Mechanical				
Focal length	6 mm (0.2")	12 mm (0.5")	15 mm (0.6")	25 mm (1.0")
Lens mount	M12-mount, mechanical autofocus lens.			
Lens cap	Transparent lens cap. Polarization lens cap is optional.			
Light source	White light. Red or blue light is optional.			
Indicator	Power indicator (PWR), network indicator (LNK/ACT), and user-defined indicator (U1/U2).			
Dimension	118.7 mm × 78 mm × 73.2 mm (4.7" × 3.1" × 2.9")			
Weight	Approx. 520 g (1.1 lb.)			
Ingress protection	IP67 (under proper installation of waterproof lens cap)			
Temperature	Working temperature: 0 °C to 50 °C (32 °F to 122 °F) Storage temperature: -30 °C to 70 °C (-22 °F to 158 °F)			
Humidity	20% to 95% RH, non-condensing			
General				
Client software	IDMVS			
Certification	CE, FCC, RoHS			

# HIKROBOT

Hangzhou Hikrobot Technology Co., Ltd.  
No.399 Danfeng Road, Binjiang District, Hangzhou 310051, China.  
en.hikrobotics.com

Copyright Hikrobot

Hangzhou Hikrobot Technology Co., Ltd. All Rights Reserved. Hangzhou Hikrobot Technology does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice. All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.