

MV-IDH3013

1.3 MP Wired Handheld Code Reader



Introduction

MV-IDH3013 wired handheld code reader adopts code reading algorithm and can read different types of one-dimensional and two-dimensional codes, and output results rapidly. It has good decoding capability for codes with spots, defects and low contrast ratio, and entry level DPM code.

Key Feature

- Adopts code reading algorithm to read different types of one-dimensional and two-dimensional codes.
- Provides good robustness to read codes with spots, defects and low contrast ratio.
- Supports continuous code reading, batch code reading for improving code reading efficiency.
- Supports multiple communication protocols, including TCP, Serial, FTP, UDP, USB HID, etc.
- Easy to replace components.


Applicable Industry

Consumer electronics, medical treatment, appliance manufacturing, etc.

Available Model

- Fast Ethernet with near distance: MV-IDH3013-05N-R1L
- Fast Ethernet with standard distance: MV-IDH3013-05S-R1L
- USB interface with near distance: MV-IDH3013-05N-R1U
- USB interface with standard distance: MV-IDH3013-05S-R1U

Dimension

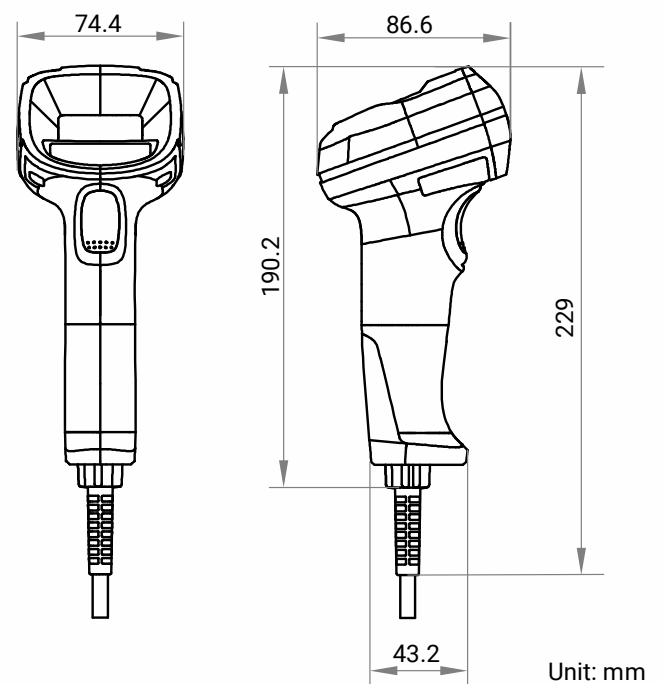

Specification

Model	MV-IDH3013-05N-R1L(U)		MV-IDH3013-05S-R1L(U)
Performance			
Symbologies	1-dimensional codes: Code 39, Code 93, Code 128, CodaBar, EAN 8, EAN 13, Matrix 2 of 5, ITF 14, UPCA, UPCE		
	2-dimensional codes: QR Code, Data Matrix		
Min. accuracy	3 mil	4 mil	
Max. frame rate	50 fps		
Sensor type	CMOS, global shutter		
Pixel size	2.7 μm × 2.7 μm		
Sensor size	1/4"		
Resolution	1280 × 1024		
Depth of field*	Code 128 (3 mil): 35 mm to 80 mm Code 128 (10 mil): 10 mm to 170 mm Code 39 (5 mil): 15 mm to 100 mm Code 39 (20 mil): 20 mm to 250 mm Data Matrix (10 mil): 5 mm to 115 mm QR Code (20 mil): 20 mil to 190 mm	Code 39 (5 mil): 40 mm to 160 mm Code 128 (10 mil): 10 mm to 400 mm Data Matrix (10 mil): 30 mm to 200 mm QR Code (15 mil): 15 mm to 280 mm QR Code (20 mil): 20 mm to 370 mm	
Field of view	Horizontal 40°, vertical 34°		
Detection angle	Tilt angle ± 60°, skew angle ± 60°, rotation angle 360°		
Symbol contrast	20%		
Communication protocol	Fast Ethernet type device: SmartSDK, TCP Client, FTP, TCP Server, UDP, Serial USB type device: SmartSDK, USB (HID/CDC)		
Electrical feature			
Data interface	Fast Ethernet type device: Fast Ethernet, RS-232, DC terminal USB type device: USB2.0, DC terminal		
Power supply	Fast Ethernet type device: 12 VDC to 24 VDC USB type device: 5 VDC (USB), 12 VDC to 24 VDC (DC terminal)		
Max. power consumption	Fast Ethernet type device: 1.75 W@12 VDC USB type device: 1.5 W@5 VDC (USB), 1.8 W@12 VDC (DC terminal)		
Mechanical			
Focal length	4.7 mm		
Lens mount	M5.8-mount		
Ambient illumination	0 lux to 100000 lux		
Light source	Red LED		
Aiming system	Cross laser aiming		
Dimension	74.4 mm × 86.6 mm × 190.2 mm (2.9" × 3.4" × 7.5")		
Weight	Approx. 160 g (0.4 lb.)		
Ingress protection	IP42		
Temperature	Working temperature: -20 °C to 50 °C (-4 °F to 122 °F) storage temperature: -40 °C to 70 °C (-40°F to 158 °F)		
Humidity	20% to 80% RH, non-condensing		
Drop height	1.5 m (59.1"), 50 times		

Specification

General	
Client software	IDMVS
Certification	CE, KC
*Test condition: Environment temperature=25 °C (77 °F), ambient illumination=250 lux filament lamp, Hikrobot's test symbolologies are used.	

HIKROBOT

Hangzhou Hikrobot Co., Ltd.
en.hikrobotics.com

© Hangzhou Hikrobot Co., Ltd. All Rights Reserved.
Hangzhou Hikrobot does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.