

MV-VB2210-120G

Intel Bay Trail Platform Vision Box



CE FCC RoHS

Introduction

MV-VB2210-120G vision box adopts Intel E3845 CPU and memory of 4GB DDR3L. It features stable performance, compact design, and fast response, etc.

Key Feature

- Onboard Intel E3845 SoC and 1.91GHz CPU.
- 4GB DDR3L memory and onboard SSD of high reliability.
- 3 Intel GigE ports and enhanced anti-surge design to ensure the stable running of the machine vision cameras.
- Supports multiple opto-isolated inputs and outputs.
- Controls the light via light interface.
- Adopts 2 HDMI interfaces and supports independent display.

Available Model

MV-VB2210-120G



Applicable Industry

Robots, laser devices, numerical control machine, package detection devices, etc.

Accessories

- Video output cable: It is recommended to use HDMI cable if the monitor is with HDMI interface.
You need to purchase HDMI-VGA cable if the monitor is with VGA interface.
- Mounting plate: It is used to fix the device, and you need to purchase separately.

Dimension

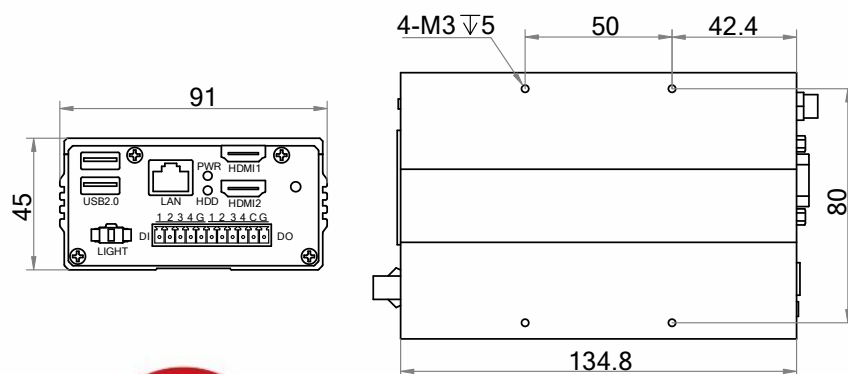

Unit: mm



Specification

Model	MV-VB2210-120G
Performance	
CPU	Intel E3845, quad-core 1.91GHz
Memory	4 GB DDR3L-1333
Storage	128 GB SSD
GPU	Integrated Gen7 GPU; supports 3D image hardware acceleration; supports video decoding hardware acceleration of different formats
Operating system	Windows 7/10
External interface	
Video output	HDMI interface × 2; supports independent display; max. resolution: 2560 × 1600
Digital I/O	Opto-isolated input × 4, opto-isolated output × 4
Light interface	Voltage control × 1; output voltage: 0 VDC to 24 VDC; max. power: 24 W
Network interface	RJ45 Intel I210 interface × 3
USB interface	USB3.0 × 1, USB2.0 × 3, supports 1 built-in extensible USB2.0
Serial port	Half-duplex RS-485 × 1, RS-232 × 1
Electrical features	
Power supply	24 VDC/2.5 A
Power consumption	≤ 34 W
Mechanical	
Dimension	134.8 mm × 91 mm × 45 mm (5.3" × 3.6" × 1.8")
Weight	Approx. 650 g (1.4 lb.)
Temperature	0 °C to 50 °C (32 °F to 122 °F)
Humidity	20% to 80% RH
General	
Certification	CE, FCC, RoHS

HIKROBOT

Hangzhou Hikrobot Technology Co., Ltd.
No.399 Danfeng Road, Binjiang District, Hangzhou 310051, China.
en.hikrobotics.com

Copyright Hikrobot

Hangzhou Hikrobot Technology Co., Ltd. All Rights Reserved. Hangzhou Hikrobot Technology does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice. All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.