

MVGL-ID6400-00CNN

12 MP Smart Code Reader



CE

FC

RoHS

Introduction

With built-in code reading algorithm, MVGL-ID6400-00CNN smart code reader can read different types of 1-dimensional code and 2-dimensional code with reading speed up to 60 codes/s. It adopts deep learning algorithm to process image with good robustness, and can recognize various poor printing quality barcodes.

Key Feature

- Adopts CMOS sensor to acquire image data and provide high-quality image.
- Adopts built-in code reading algorithm to read different codes.
- Supports various trigger modes and acquisition modes.
- Adopts multiples IO interface for input and output signals.
- Supports RS-232 serial port and indicators displaying device status.

Available Model

MVGL-ID6400-00CNN


Applicable Industry

Logistics code reading, factory automation, etc.

Accessories

- Lens: MF series FA lens
- Light source: MV-LB-230-230-4030WL-A

Dimension

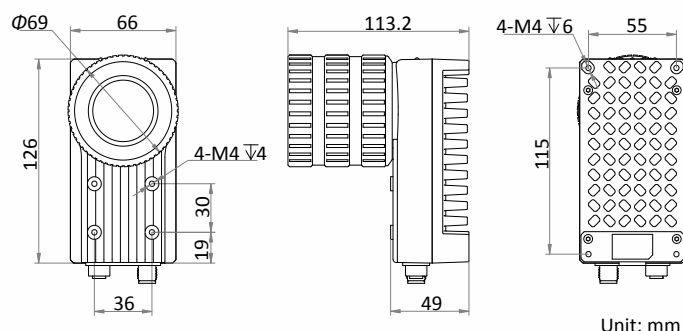

Specification

Model	MVGL-ID6400-00CNN
Performance	
Symbologies	1-dimensional codes: Code 39, Code 128, Code 93, ITF25, CodaBar, EAN 2-dimensional codes: QR, Data Matrix
Max. frame rate	20 fps
Max. reading speed	60 codes/sec
Sensor type	CMOS, rolling shutter
Pixel size	1.85 μm \times 1.85 μm
Sensor size	1/1.7"
Resolution	4096 \times 3000
Exposure time	16 μs to 1 sec
Gain	0 dB to 40 dB
Mono/color	Mono
Communication protocol	SmartSDK, TCP Client, TCP Server, Serial, FTP, HTTP
Electrical features	
Data interface	Gigabit Ethernet
Digital IO	12-pin M12 connector provides power and I/O, including opto-isolated input (LineIn 0/1/2) \times 3, opto-isolated output (LineOut 0/1/2) \times 3, and RS-232 \times 1.
Power supply	12 VDC to 24 VDC
Power consumption	Approx. 12 W@24 VDC
Mechanical	
Lens mount	C-mount
Light source	Not included
Lens cap	Included
Dimension	126 mm \times 66 mm \times 113.2 mm (5.0" \times 2.6" \times 4.5")
Weight	Approx. 750 g (1.7 lb.)
Ingress protection	IP67 (under proper installation of waterproof lens cap)
Temperature	Working temperature: 0 $^{\circ}\text{C}$ to 50 $^{\circ}\text{C}$ (32 $^{\circ}\text{F}$ to 122 $^{\circ}\text{F}$) Storage temperature: -30 $^{\circ}\text{C}$ to 70 $^{\circ}\text{C}$ (-22 $^{\circ}\text{F}$ to 158 $^{\circ}\text{F}$)
Humidity	20% to 95% RH, non-condensing
General	
Client software	IDMVS
Certifications	CE, FCC, RoHS

HIKROBOT

Hangzhou Hikrobot Technology Co., Ltd.
No.399 Danfeng Road, Binjiang District, Hangzhou 310051, China.
en.hikrobotics.com

Copyright Hikrobot

Hangzhou Hikrobot Technology Co., Ltd. All Rights Reserved. Hangzhou Hikrobot Technology does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice. All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.